


When you define virtual paths on APLWebServices, the current operation of the system is to internally order the virtual paths based on alphabetical order and length. For example, if this is your APLWebServices configuration:

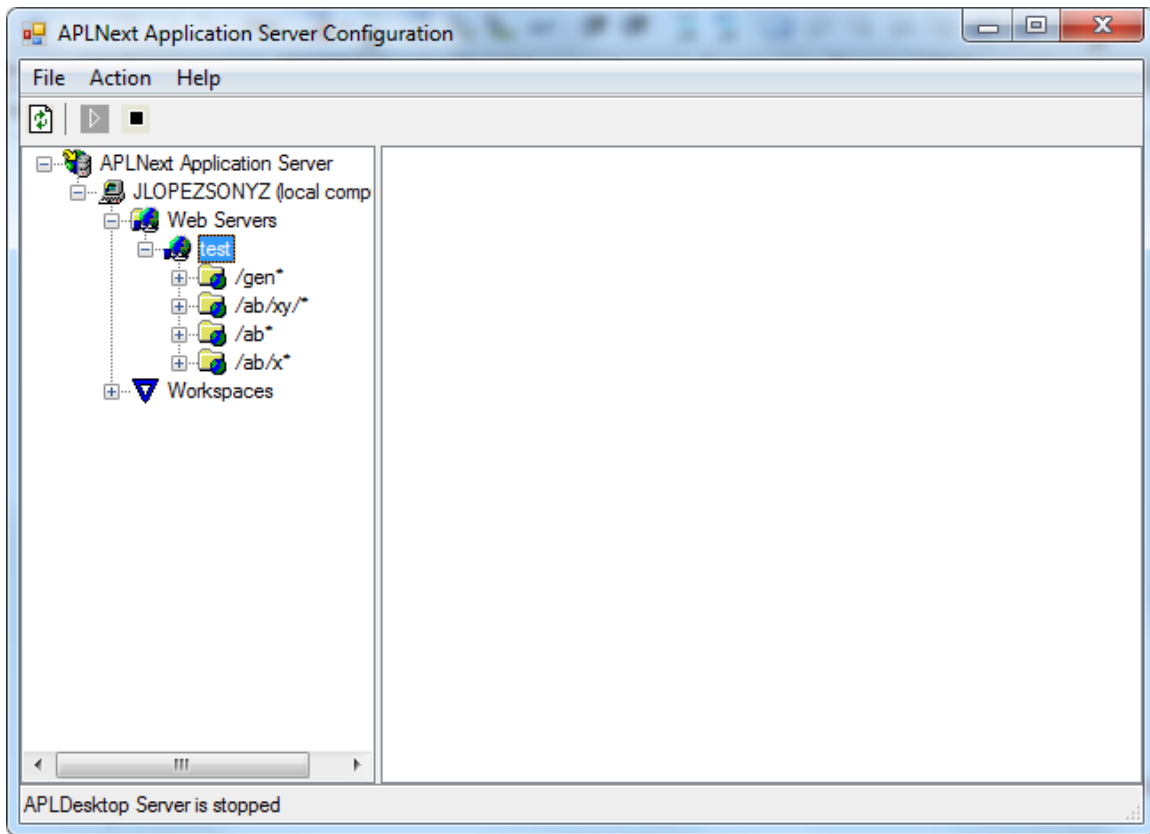

The system creates an internal list of virtualpaths in this order:

1. /ab/xy/*
2. /ab/x*
3. /gen*
4. /ab*

When a request is made to the server, the system uses the `String.StartsWith` function to evaluate which path to use.